

FEATURES

- GaAs active devices
- Power gain @27dB
- Low distortion
- Excellent linear gain
- Low noise figure
- High reliability
- Low cost


DESCRIPTION

The SMG1027PM is a GaAs hybrid push-pull amplifier module.

The part employs GaAs dies and is operated from 50MHz to 1003MHz with supply voltage +24V(DC)

OUTLINE

PIN CONFIGURATION

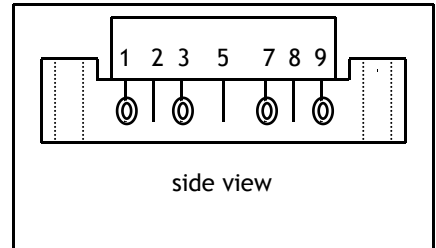

Pin Description

1	Input
5	+V _B
9	Output
2、3、7、8	GND

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNITS
G _p	Power Gain	f=50 MHz	25.5	26.5	dB
I _{tot}	Total current consumption(DC)	V _B =24V	270	330	mA

LIMITING VALUES

In accordance with the Absolute Maximum Rating System

SYMBOL	PARAMETER	MIN.	MAX.	UNITS
V _i	RF input voltage	-	55	dBmV
T _{stg}	Storage temperature	-40	+100	°C
T _{mb}	Operating mounting base temperature	-20	+90	°C

SANLAND TECHNOLOGY

·Tel: 86-0755-28968333
 ·Fax: 86-0755-89724455
 ·2019.4

·Http: www.sanlandtech.com
 ·E-mail: info@sanlandtech.com

CHARACTERISTICS

(Bandwidth 50 to 1003MHz; $T_{mb}=25^{\circ}\text{C}$, $V_B=24\text{V}$, $Z_S=Z_L=75\Omega$)

SYMBOL	PARAMETER	UNIT	MIN.	TYP.	MAX.	CONDITIONS
G_p	Power Gain	dB	25.5	-	26.5	f=50MHz
G_p	Power Gain	dB	-	27.5	-	f=1003MHz
SL	Slope cable equivalent	dB	1.0	-	2.0	f=50 to 1003 MHz
FL	Flatness of frequency response	dB	-	-	± 0.5	f=50 to 1003 MHz
S_{11} & S_{22}	Input/Output Return Loss	dB	-	-	-16	f=50 to 860 MHz
S_{11} & S_{22}	Input/Output Return Loss	dB	-	-	-12	f=861 to 1003 MHz
CTB	Composite Triple Beat	dB	-	-	-69	99channels flat; $V_o=44\text{dBmV}$;
CSO	Composite Second Order distortion	dB	-	-	-68	CTB measured at 543.25 MHz;
X_{mod}	Cross Modulation	dB	-	-	-61	CSO measured at 544.5 MHz;
V_o	Output Voltage	dBmV	60	-	-	$d_{im}=-60\text{dB}$
F	Noise Figure	dB	-	5.0	-	f=860 MHz
I_{tot}	Total Current Consumption	mA	270	330		$V_B=+24\text{V}$

The module normally operates at $V_B=24\text{ V}(\pm 0.5)$,

MODULE DIMENSIONS

