

FEATURES


- GaAs active devices
- Power gain @25dB
- Low distortion
- Excellent linear gain
- Low noise figure
- High reliability
- Low cost

DESCRIPTION

The SMG1025P is a GaAs hybrid push-pull amplifier module. The part employs GaAs dies and is operated from 50MHz to 1000MHz with supply voltage +24V(DC)

OUTLINE

PIN CONFIGURATION

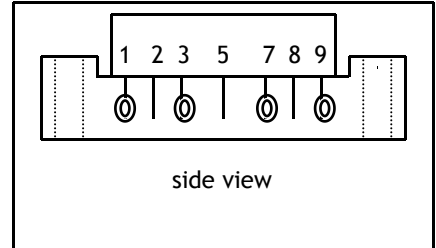

Pin Description

1	Input
5	+V _B
9	Output
2、3、7、8	GND

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNITS
G _p	Power Gain	f=50 MHz	23	24.5	dB
I _{tot}	Total current consumption(DC)	V _B =24V	240	300	mA

LIMITING VALUES

In accordance with the Absolute Maximum Rating System

SYMBOL	PARAMETER	MIN.	MAX.	UNITS
V _i	RF input voltage	-	50	dBmV
T _{stg}	Storage temperature	-40	+100	°C
T _{mb}	Operating mounting base temperature	-20	+90	°C

SANLAND TECHNOLOGY

·Tel: 86-0755-28968333
 ·Fax: 86-0755-89724455
 ·2019.3

·Http: www.sanlandtech.com
 ·E-mail: info@sanlandtech.com

CHARACTERISTICS

(Bandwidth 50 to 1000MHz; $T_{mb}=25^{\circ}\text{C}$, $V_B=24\text{V}$, $Z_S=Z_L=75\Omega$)

SYMBOL	PARAMETER	UNIT	MIN.	TYP.	MAX.	CONDITIONS
G_p	Power Gain	dB	23	-	24.5	$f=50\text{MHz}$
G_p	Power Gain	dB	-	25.5	-	$f=1000\text{MHz}$
SL	Slope cable equivalent	dB	1.0	-	2.5	$f=50$ to 1000 MHz
FL	Flatness of frequency response	dB	-	-	± 0.5	$f=50$ to 1000 MHz
$S_{11}\&S_{22}$	Input &Output Return Loss	dB	-	-	-16	$f=50$ to 860 MHz
$S_{11}\&S_{22}$	Input &Output Return Loss	dB	-	-	-14	$f=861$ to 1000 MHz
CTB	Composite Triple Beat	dB	-	-	-68	PAL99 channels flat; $V_o=42\text{dBmV}$;
CSO	Composite Second Order distortion	dB	-	-	-67	CTB measured at 543.25 MHz;
X_{mod}	Cross Modulation	dB	-	-	-60	CSO measured at 544.5 MHz;
V_o	Output Voltage	dBmV	60	-	-	$d_{im}=-60\text{dB}$
F	Noise Figure	dB	-	-4.0	-	$f=860$ MHz
I_{tot}	Total Current Consumption	mA	240	300		$V_B=+24\text{V}$

The module normally operates at $V_B=24$ V(± 0.5),

MODULE DIMENSIONS

